


### Technical parameters

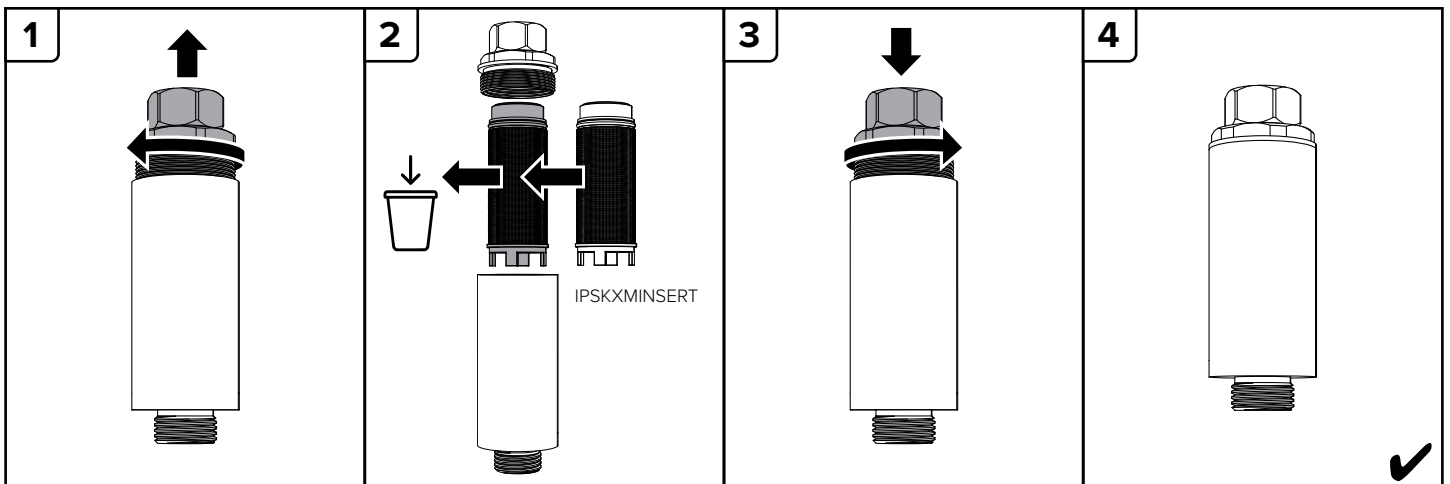

### Technical parameters

IPS KalyxX 100 mini		Filter accuracy	Water flow rate	Rated working pressure	Ambient temperature	Maximum water hardness	Lifespan
1/2" IPSKXMG12W	mini filter	75 µm	0.9 m³/h	0.75 MPa	1°C - 50 °C	< 56 °dH (10 mmol/l)	12 months or 22.000 litres
3/4" IPSKXMG34W	linear						
IPSKXMINSERT	replacement insert	75 µm	0.9 m³/h	0.75 MPa	1°C - 50 °C	< 56 °dH (10 mmol/l)	12 months or 22.000 litres

It is recommended to clean the filter element once every three months (depending on the actual water consumption, raw water quality, etc.).